



MI 500

Working Volume	With Screw Caps	480 µl
	With Push Caps	550 µl
	With Heat Seal	600 µl
Type of Rack	Polypropylene Polycarbonate (for Push Caps only)	
Type of Rack Lid	Slide Lock Push Lock	
Rack Identifier	Narrow Side	1D and Human Readable
	Bottom	2D
Storage Temperature	With Screw Caps	-196°C
	With Push Caps	-80°C
	With Heat Seal	-80°C
Standard Side Code Tube (optional)	1D and Human Readable	
Screw Caps	Pre-Capped Stacked on SBS 96 Cap Rack Bulk Ware	
Purity	Production Sterile (ISO 8) Pre-Sterilized (Beta Radiation)	
Outer Diameter	8.65 mm	
Tube Height	Without Cap	26.9 mm
	With Screw Cap	33.1 mm
	With Push Cap	28.0 mm
Rack Height	Without Cap	27.4 mm
	Screw Capped Tubes	33.6 mm
	With Lid	36.3 mm

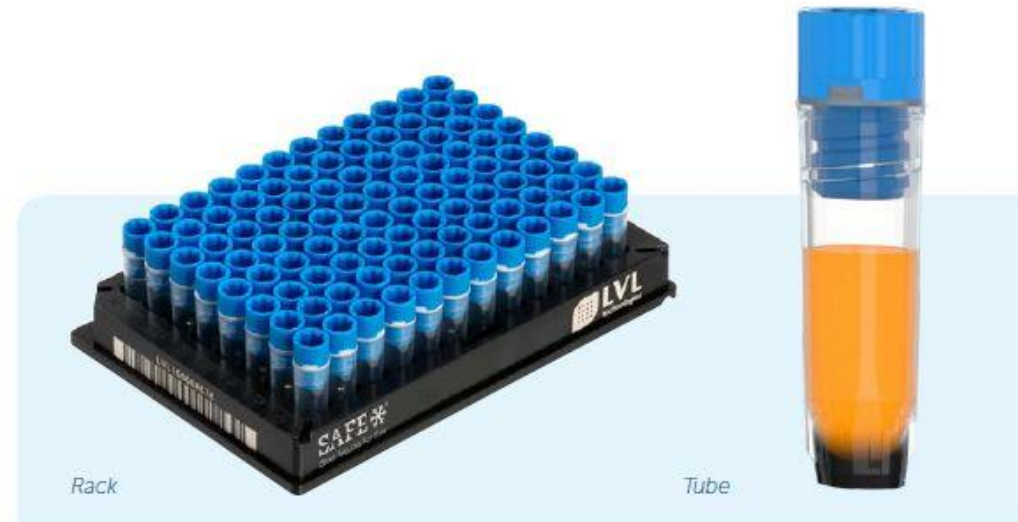

Technical Drawing

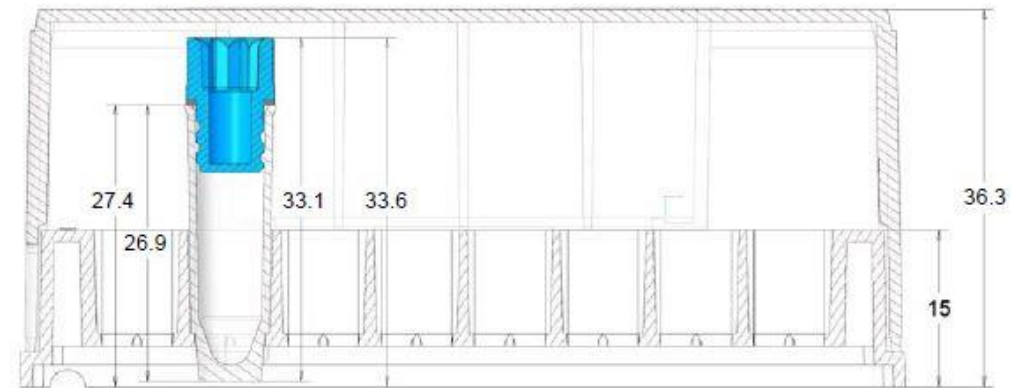

Standard Item Number 2DNC-I05-BL-NS-SLP-L

Order Information

