

LX 1000

Working Volume	With Screw Caps	1,000 µl
	With Push Caps	1,000 µl
	With Heat Seal	1,030 µl

Type of Rack	Polycarbonate Polypropylene
--------------	--------------------------------

Type of Rack Lid	Slide Lock Push Lock
------------------	-------------------------

Rack Identifier	Narrow Side	1D and Human Readable
	Bottom	2D

Storage Temperature	With Screw Caps	-196°C
	With Push Caps	-80°C
	With Heat Seal	-80°C

Standard Side Code Tube	(optional)	1D and Human Readable
-------------------------	------------	-----------------------

Screw Caps	Pre-Capped Stacked on SBS 96 Cap Rack Bulk Ware
------------	---

Purity	Production Sterile (ISO 8) Pre-Sterilized (Beta Radiation)
--------	---


Outer Diameter	8.65 mm
----------------	---------

Tube Height	Without Cap	44.3 mm
	With Screw Cap	45.6 mm
	With Push Cap	45.6 mm

Rack Height	Without Cap	44.8 mm
	Screw Capped Tubes	46.1 mm
	With Lid	48.3 mm



Technical Drawing

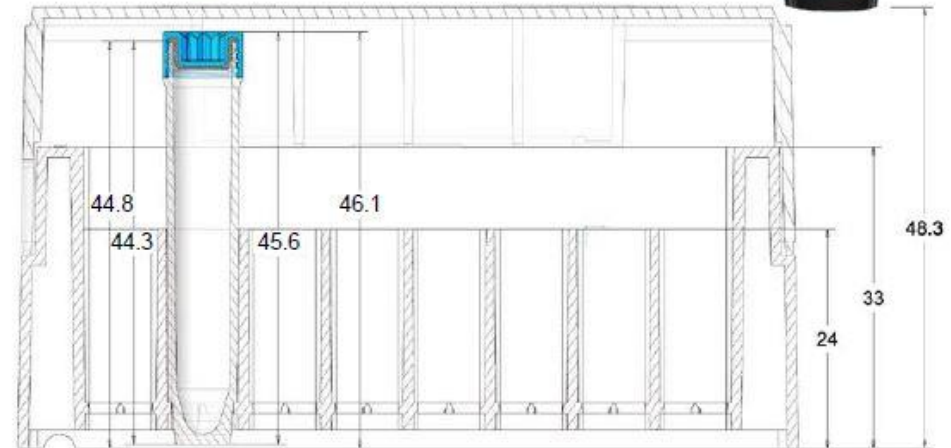

Standard Item Number 2DNC-X10-BL-NS-SLC-L

Order Information

