


# XLX 4000

Working Volume	With Screw Caps	4,000 µl
	With Heat Seal	4,000 µl
Type of Rack	Polypropylene	
Type of Rack Lid	Slide Lock	
Rack Identifier	Narrow Side	1D and Human Readable
	Bottom	2D
Storage Temperature	With Screw Caps	-196°C
	With Heat Seal	-80°C
Standard Side Code Tube	1D and Human Readable	
Screw Caps	Pre-Capped Stacked on SBS 96 Cap Rack Bulk Ware	
Purity	Production Sterile (ISO 8) Pre-Sterilized (Beta Radiation)	
Outer Diameter	13.00 mm	
Tube Height	Without Cap	82.5 mm
	With Screw Cap	83.8 mm
Rack Height	Without Cap	83.2 mm
	Screw Capped Tubes	84.5 mm
	With Lid	87.0 mm



## Technical Drawing

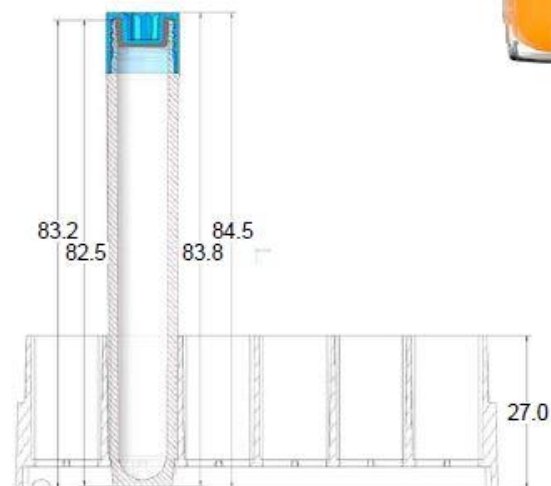

Standard Item Number 2DSC-X40-BL-NS-SLP-L

Order Information

